



# Icon Overview.



Resolution



Smart Motion  
Detection Plus



Smart  
Analytics



Starlight  
Technology



Fixed Lens



Varifocal Lens



Motorised  
Lens



Optical Zoom



Enhanced Power  
Over Ethernet



Power Over  
Coax



Ultra High  
Definition



Thermal  
Imaging



IR Range



White Light



Three in  
One Camera



Artificial  
Intelligence



Viewing Angle



Full-Color

**Our value  
added  
distribution.**

# Tech Support



**Pre-configuration  
service available**



**All Dahua recorders  
sent out with latest  
or custom firmware**



**Remote  
online support**

**Tech support call logs  
to identify training  
requirements**




**Call summary emailed  
to the customer**




**IP Cameras.**

# Dahua Naming Rule

## IPC

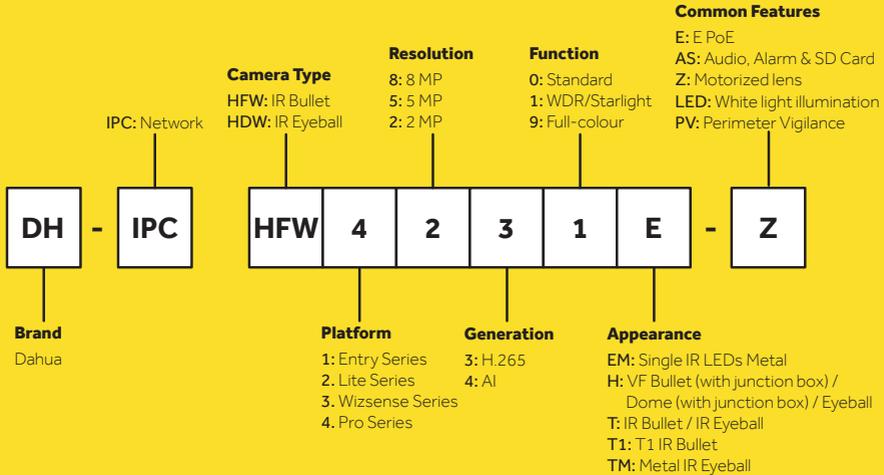

## IP PTZ

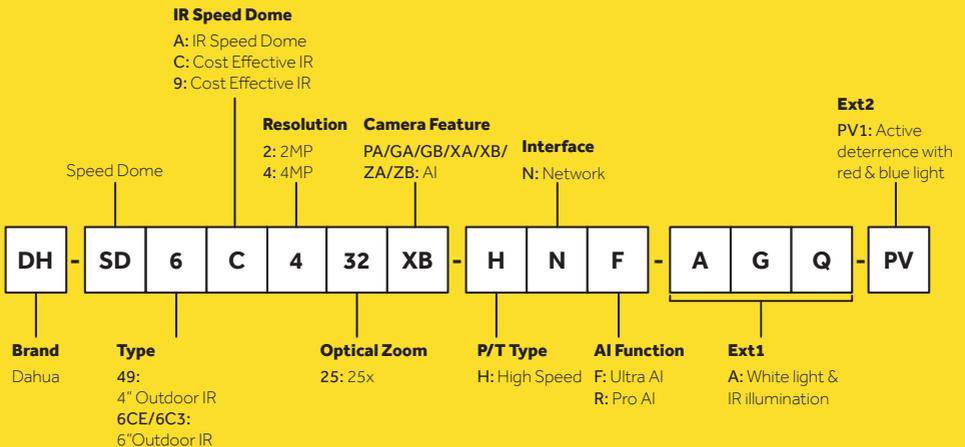

# IP CAMERAS



## 5MP Entry IR Fixed Focal Eyeball Camera

DH-IPC-HDW1530TP-0280B-S6

5MP 1/2.7" CMOS image sensor, low luminance, Outputs max. 5MP (2880 × 1620) @20 fps and supports 2688 × 1520 (2688 × 1520) @25/30 fps, H.265 codec, Built-in IR LED, and the max. illumination distance is 30m, ROI, SMART H.264 +/H.265+, Rotation mode, DWDR, 3D NR, HLC, BLC, Built-in Mic, DC12V/PoE power supply, IP67.



## 8MP Entry IR Fixed Focal Eyeball Camera

DH-IPC-HDW1830T-S6

8MP 1/2.7" CMOS image sensor, low luminance, Outputs max. 8MP (3840 × 2160) @15 fps and supports 2688 × 1520 (2688 × 1520) @25/30 fps. Built-in IR LED, illumination distance is 30m. ROI, SMART H.264 +/H.265+ Rotation mode, DWDR, 3D NR, HLC, BLC. Built-in Mic. DC12V/PoE power supply, IP67.

DH-IPC-HDW1830TP-0280B-S6	2.8mm lens
IPC-HDW1830T-0360-S6	3.6mm lens



## 4MP Lite Full-color Fixed Focal Eyeball Camera

DH-IPC-HDW2439TP-AS-LED-0280B-S2

4MP, 1/3" CMOS image sensor, low illumination, Outputs 4MP (2560 × 1440) @ 25/30 fps, Max. supports 4MP(2688 × 1520) @ 20 fps, H.265 codec, Built-in warm lights, max. illumination distance: 30m, ROI, SMART H.264+/H.265+. Rotation mode, WDR, 3D DNR, HLC, BLC. Built-in Mic, Supports max. 256 GB Micro SD card, DC12V/PoE power supply, IP67.



## 5MP Lite IR Fixed Focal Eyeball Camera

DH-IPC-HDW2531TMP-AS-0280B-S2

5MP, 1/2.7" CMOS image sensor, low illumination. Outputs max. 5MP (2592 × 1944) @20 fps, supports 2688 × 1520, (2688 × 1520) @25/30 fps, H.265 codec, Built-in IR LED, max IR distance: 30m, ROI, SMART H.264+/H.265+. Rotation mode, WDR, 3D NR, HLC, BLC. Supports max. 256 GB Micro SD card, built-in Mic, DC12V/PoE power supply, IP67.





**5MP Starlight/Lite AI IR (40M) Vari Focal Eyeball Dome**  
IPC-HDW3541T-ZAS

5MP, 1/2.7" CMOS image sensor, low illuminance. Outputs max. 5MP (2592 × 1944) @ 20 fps, H.265 codec, Built-in IR LED, max. IR distance: 40m, Supports max. 256 G Micro SD card, built-in Mic, DC12V/PoE, IP67, SMD.

IPC-HDW3541T-ZAS	White
IPC-HDW3541T-ZAS-G	Grey



**5MP Starlight/Lite IR (30m) Fixed Focal Eyeball Camera**  
DH-IPC-HDW2531TM-AS-S2

5MP, 1/2.7" CMOS image sensor, low illuminance. Outputs 2688×1520 (2688×1520) @ 25/30 fps, and supports max. 5MP (2592×1944) @ 20 fps, H.265 codec. Built-in IR LED, max IR distance: 30m, Supports max. 256 GB Micro SD card, built-in Mic, DC12V/PoE power support, IP67.

DH-IPC-HDW2531TMP-AS-0280B-S2	2.8mm lens
DH-IPC-HDW2531TMP-AS-0360B-S2	3.6mm lens



**4MP Starlight/Lite AI IR (50M) Fixed Focal Eyeball Camera**  
DH-IPC-HDW3441TMP-AS-0280B-DZ

4MP, 1/3" CMOS image sensor, low illuminance, Outputs max. 4MP (2688 × 1520) @ 30 fps, H.265 codec, high compression rate, low bit rate, Built-in IR LED, max. IR distance: 50m, Supports max. 256 G Micro SD card, built-in Mic, DC12V/PoE power support, IP67, SMD, 2.8mm lens.

DH-IPC-HDW3441TMP-AS-0280B-DZ	White
-------------------------------	-------



# IP CAMERAS

## 5MP Starlight/Lite AI IR (50M) Fixed Focal Turret Camera

DH-IPC-HDW3541EM-AS

5MP, 1/2.7" CMOS image sensor, low illuminance. Outputs max. 5MP (2592 × 1944) @20 fps, H.265 codec, high compression rate, low bit rate, Built-in IR LED, max. IR distance: 50m, Supports max. 256 G Micro SD card, built-in Mic, DC12V/PoE power support, IP67, SMD.

DH-IPC-HDW3541TMP-AS-0280B	2.8mm lens
IPC-HDW3541EM-AS-0280-G	2.8mm lens – Grey
DH-IPC-HDW3541EMP-AS-0360B	3.6mm lens



## 5MP TiOC Full-color Fixed Focal Eyeball Dome

DH-IPC-HDW3549H-AS-PV

5MP, 1/2.7" CMOS image sensor, low illuminance. Outputs max. 5MP (2592 × 1944) @20 fps, and supports 4MP (2688 × 1520) @25/30 fps. H.265 codec, Built-in warm illuminator, and the max. illumination distance: 30 m. ROI, SMART H.264+/H.265+, Rotation mode, WDR, 3D DNR, HLC, BLC. Supports sound and light alarm linkage. When an alarm is triggered, the camera links sound alarm and light flashing. Supports one-tap disarming. You can disarm the events of alarm output, sending email, audio, and light in the configured period, Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic and speaker. DC12V/PoE power supply, IP67, SMD Plus. Red and blue flashlight alarm.

DH-IPC-HDW3549HP-AS-PV-0280B	2.8mm lens
DH-IPC-HDW3549HP-AS-PV-0280B-G	2.8mm lens – Grey
DH-IPC-HDW3549HP-AS-PV-0360B	3.6mm lens



## 5MP TiOC Full-color Fixed Focal Bullet DH-IPC-HFW3549T1-AS-PV

5MP, 1/2.7" CMOS image sensor, low illuminance, Outputs max. 5MP (2592 × 1944) @20 fps, and supports 4MP (2688 × 1520) @25/30 fps, H.265 codec, Built-in warm illuminator, and the max. illumination distance: 40m, ROI, SMART H.264+/H.265+, Rotation mode, WDR, 3D DNR, HLC, BLC, Supports sound and light alarm linkage. Supports one-tap disarming. You can disarm the events of alarm output, sending email, audio, and light in the configured period, Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic and speaker, DC12V/PoE power supply, IP67, SMD Plus, Red and blue flashlight alarm.



DH-IPC-HFW3549T1P-AS-PV-0280B	2.8mm lens
DH-IPC-HFW3549T1P-AS-PV-0360B	3.6mm lens



## 8MP IP TiOC Full-color Fixed Focal Eyeball Dome DH-IPC-HDW3849H-AS-PV

8MP, 1/2.8" CMOS image sensor, low illuminance. Outputs max.8MP (3840 × 2160) @20 fps (AI function enabled by default)and supports 8MP (3840 × 2160) @25/30 fps (with AI function disabled), H.265 codec, Built-in warm illuminator, and the max. illumination distance: 30m, ROI, Smart H.265+/Smart H.264+, Rotation mode, WDR, 3D NR, HLC, BLC. Supports sound and light alarm linkage. Supports one-tap disarming. You can disarm the events of alarm output, sending email, audio, and light in the configured period, Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic and speaker, DC12V/PoE power supply, IP67, SMD Plus, Red and blue flashlight alarm.



DH-IPC-HDW3849HP-AS-PV-0280B	2.8mm lens
IPC-HDW3849H-AS-PV-0280-G	2.8mm lens – Grey
DH-IPC-HDW3849HP-AS-PV-0360B	3.6mm lens



# IP CAMERAS

## 5MP TiOC 2.0 Smart Dual Illumination Fixed Focal Eyeball Dome

DH-IPC-HDW3549H-AS-PV-S3

5MP, 1/2.7" CMOS image sensor, Outputs max. 5MP (2592 × 1944) @20 fps, and supports 4MP (2688 × 1520) @25/30 fps, H.265 codec. Built-in warm illuminator, and the max. illumination distance: 30m, ROI, SMART H.264+/H.265+, Rotation mode, WDR, 3D DNR, HLC, BLC. Supports sound and light alarm linkage. Supports one-tap disarming. You can disarm the events of alarm output, sending email, audio, and light in the configured period., Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic and speaker, DC12V/PoE power supply, IP67, SMD Plus, Red and blue flashlight alarm.



DH-IPC-HDW3549HP-AS-PV-0280B-S3 2.8mm lens

IPC-HDW3549H-AS-PV-0280-S3-G 2.8mm lens – Grey

DH-IPC-HDW3549HP-AS-PV-0360B-S3 3.6mm lens



## 5MP TiOC 2.0 Smart Dual Illumination Fixed Focal Bullet

DH-IPC-HFW3549T1-AS-PV-S3

5MP, 1/2.7" CMOS image sensor, low luminance. Outputs max. 5MP (2592 × 1944)@20 fps and supports 4MP (2688 ×, H.265 codec. Built-in warm light and IR LED; the max. IR illumination distance is 30m, ROI, SMART H.264+/H.265+, AI H.264/H.265. Rotation mode, WDR, 3D NR, HLC, BLC. Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD, DC12V/PoE power supply. IP67. Sound and light alarm (red and blue lights). SMD 3.0. One-click arming/disarming through alarm input.



DH-IPC-HFW3549T1P-AS-PV-0280B-S3 2.8mm lens

DH-IPC-HFW3549T1P-AS-PV-0360B-S3 3.6mm lens



## 8MP IP TiOC 2.0 Smart Dual Illumination Fixed Focal Eyeball Dome DH-IPC-HDW3849H-AS-PV-S3

8MP, 1/2.8" CMOS image sensor, low illuminance. Outputs max.8MP (3840 × 2160) (@20 fps (AI function enabled by default)and supports 8MP (3840 × 2160) (@25/30 fps (with AI function disabled), H.265 codec, Built-in warm illuminator, and the max. illumination distance: 30m, ROI, Smart H.265+/Smart H.264+, Rotation mode, WDR, 3D NR, HLC, BLC, Supports sound and light alarm linkage. Supports one-tap disarming. You can disarm the events of alarm output, sending email, audio, and light in the configured period, Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic and speaker, DC12V/PoE power supply, IP67, SMD Plus, Red and blue flashlight alarm.



DH-IPC-HDW3849HP-AS-PV-0280B-S3	2.8mm lens
IPC-HDW3849H-AS-PV-0280-S3-G	2.8mm lens – Grey
DH-IPC-HDW3849HP-AS-PV-0360B-S3	3.6mm lens



## 2MP IP Full-color Fixed Focal Starlight (30m) Bullet DH-IPC-HFW4239TP-ASE-NI-0360B

1/2.8" 2MP progressive scan STARVISTM CMOS, H. 265&H.264 triple-stream encoding, 50/60fps@1080P(1920×1080), Smart Detection supported, WDR(120dB), Day/Night(Electronic), 3DNR, AWB, AGC, BLC, Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS, 3.6mm fixed lens, 1/1 Alarm in/out, 1/1 audio in/out, Micro SD Memory, IP67, IK10, PoE.



# IP CAMERAS



**4MP 25x TIOC IP PTZ Dome IR (150m)**  
SD6C3425XB-HNR-A-PV1

1/2.8" 4MP STARVIS™ CMOS, Powerful 25x optical zoom, Starlight technology, IR distance up to 150m, Perimeter protection, Face detection, Metadata, Full-color illuminator; red and blue warning light, IP66, Smart dual illuminators (recommended to use within 50m).



**4MP 25x Starlight IR (100m) PTZ AI Camera**  
SD49425XB-HNR

1/2.8" 4MP CMOS, Powerful 25x optical zoom, Starlight technology, Max.25/30fps@4M, Deep-learning-based auto tracking and perimeter protection, Support PoE+, IR distance up to 100m, SMD, IP66.



**4MP 45x Starlight IR PTZ Camera**  
SD6AL445XA-HNR-IR

1/2.8" 4MP CMOS, Powerful 45x optical zoom, Starlight technology, Max. 25/30 fps@4MP, Deep-learning-based auto tracking and perimeter protection, Support face detection, Support Hi-PoE, SMD PLUS, IP67.





## 4MP Intelligent Traffic ANPR Camera ITC437-PW6M-IZ-GN

4MP, CMOS image sensor, Video compression standards: H.265/H.264M/H.264H/H.264B/MJPEG, Integrated design, IP67.



## 2MP Long Range Access ANPR Camera DHI-ITC237-PW6M-IRLZF1050-B

CMOS image sensor, Video compression standards: H.265/H.264M/H.264H/H.264B/MJPEG, Integrated design, IP67.





**Access ANPR Camera**  
ITC215-PW6M-IRLZF-B-C2

Adopts high-performance CMOS image sensor and processor for in-depth extraction and analysis of vehicle information 24/7, Embraces deep learning algorithm for accurate recognition of vehicles without license plate, and vehicle model, vehicle logo, vehicle series, vehicle color, and more, Various signal, data and communication interfaces; supports connecting to extra devices, such as barrier, Built-in LED illuminator for simplified installation, Motorized vari-focal lens, easy for installation and commissioning, Integrated design with low power consumption, and IP67 grade.



**Eureka Thermal Imaging Eyeball Camera**  
DH-TPC-DF1241

Uncooled VOx thermal sensor technology, Athermalized 4mm lens (thermal camera), focus-free, 1/2.7" 4MP progressive scan CMOS, Support ROI, motion detection, color palettes, Smoking and call behaviour detection, Support fire detection & alarm, Built-in 1/1 alarm in/out, Micro SD memory, IP67, PoE, Smart linkage with strobe light & audio, Dual image fusion (visible and thermal images).



DH-TPC-DF1241P-D2F2	Thermal: 256 × 192 2mm lens Visible: 4MP 2mm lens
DH-TPC-DF1241P-D3F4	Thermal: 256 × 192 3.5 mm lens Visible: 4MP 4 mm lens
DH-TPC-DF1241P-D7F8	Thermal: 256 × 192 7 mm lens Visible: 4MP 8 mm lens



## WizSense Thermal Bullet Camera

TPC-BF1241-TB3F4-DW-S2

Uncooled VOx thermal sensor technology, Athermalized lens (thermal camera), focus-free, 1/2.7" 4MP progressive scan CMOS, Wi-Fi Optional, Support ROI, motion detection, color palettes, Smoking and call behaviour detection, Support fire detection & alarm, Built-in 1/1 alarm in/out, Micro SD memory, IP67, PoE, Smart linkage with strobe light & audio, Dual image fusion (visible and thermal images).



## Thermal Value Hybrid Bullet Camera

TPC-BF2221

256x192 VOx uncooled thermal sensor technology, Athermalized lens (thermal camera), focus-free, 1/2.8" 2MP progressive scan CMOS, Support ROI, motion detection, color palettes, Support temperature measurement, Support fire detection & alarm, Built-in 2/2 alarm in/out, Micro SD memory, IP67, PoE, ePoE.




DH-TPC-BF2221P-TB3F4	3.5mm lens
DH-TPC-BF2221P-TB7F8	7mm lens




**HDCVI Cameras.**

# Dahua Naming Rule

## HDCVI

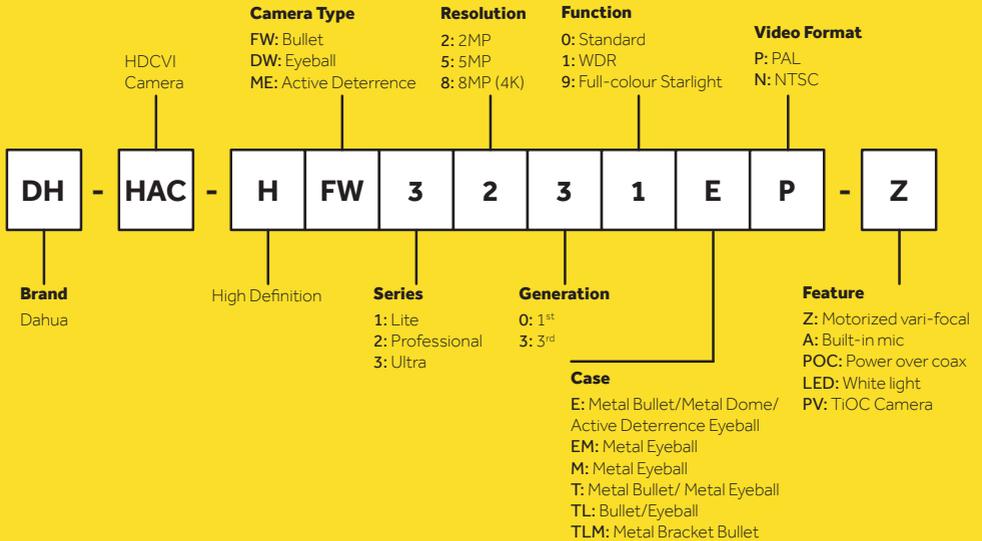

## Speed Dome

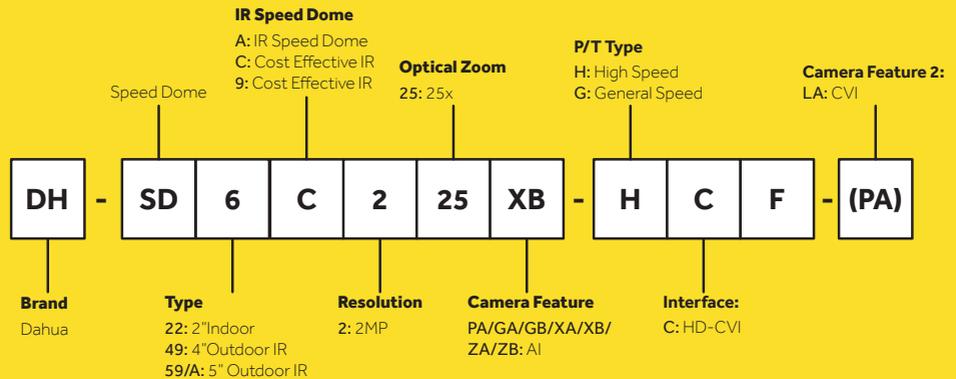

# HDCVI CAMERAS

## 2MP HDCVI IR Eyeball Camera DH-HAC-HDW1200EM-A

Max 30fps@1080P, CVI/CVBS/AHD/TVI switchable, 3.6mm fixed lens (2.8mm, 6mm optional), Built-in Mic(-A), Max. IR length 50m, Smart IR, IP67, DC12V.

DH-HAC-HDW1200EMP-A-0280B-S5	2.8mm lens
HAC-HDW1200EM-A-0280-S5-G	2.8mm lens – Grey
DH-HAC-HDW1200EMP-A-0360B-S5	3.6mm lens



## 2MP HDCVI IR Eyeball Camera DH-HAC-HDW1200MP-0280B-S5

Max 30fps@1080P, HD and SD output switchable, 2.8mm fixed lens, Max. IR length 30m, Smart IR, IP67, DC12V.



## 2MP HDCVI IR Eyeball Camera HAC-HDW1200M-0360-S4

Max 30fps@1080P, HD and SD output switchable, 3.6mm fixed lens, Max. IR length 30m, Smart IR, IP67, DC12V.





**2MP Full-color HDCVI Eyeball Camera**  
DH-HAC-HDW1239TP-A-LED-0360B-S2

24/7 color imaging, Max 30 fps@1080p, 40m illumination distance, Super Adapt, 130 dB true WDR, 3D NR, Built-in Mic (-A), 3.6 mm fixed lens, CVI/CVBS/AHD/TVI switchable, IP67, DC12V.



**5MP Starlight HDCVI IR Eyeball Camera**  
HAC-HDW1500T-Z-A-S2

5MP, Max 25 fps@5MP (16:9 video output), CVI/CVBS/AHD/TVI switchable, 2.7-12 mm motorized lens, Built-in Mic(-A), Max. IR length 60m, Smart IR, IP67, DC12V.



**5MP Starlight HDCVI IR Eyeball Camera**  
HAC-HDW1500TM-A-POC-S2

Max 25 fps@5MP (16:9 video output), Starlight, DWDR, 2D NR, CVI/CVBS/AHD/TVI switchable, 2.8mm fixed lens, Built-in Mic, Max. IR length 60m, Smart IR, IP67, PoC (only CVI)/DC12V.

HAC-HDW1500TM-A-POC-0280-S2 2.8mm lens  
HAC-HDW1500TM-A-POC-0280-S2-G 2.8mm lens – Grey



# HDCVI CAMERAS



**5MP Starlight HDCVI POC IR Eyeball Camera**  
DH-HAC-HDW1500TP-Z-A-POC-2712

Max 25 fps@5MP (16:9 video output), CVI/CVBS/AHD/TVI switchable, 2.7 mm–12 mm motorized lens, Built-in Mic, Max. IR length 60 m, Smart IR, IP67, PoC (only CVI)/DC12V.



**5MP Starlight HDCVI IR Eyeball Camera**  
DH-HAC-HDW1500TLMQP-A-0280B-S2

Max 25 fps@5MP (16:9 video output), CVI/CVBS/AHD/TVI switchable, 2.8 mm fixed lens, Built-in Mic, Max. IR length 30m, Smart IR, IP67, DC12V.



**5MP HDCVI IR Eyeball Camera**  
HAC-HDW1500EM-A-POC-0280

Max. 20fps@5MP, Built-in Mic, HD and SD output switchable, 2.8mm fixed lens, Max. IR length 50m, Smart IR, IP67, PoC/DC12V.



## 5MP Full-color HDCVI Eyeball Camera DH-HAC-HDW1509T(-A)-LED

Max 25 fps@5MP (16:9 video output), 120 dB true WDR, 3D NR, 24/7 color imaging, 40 m illumination distance, CVI/CVBS/AHD/TVI switchable, Built-in Mic (-A), 2.8mm fixed lens, IP67, DC12V.

DH-HAC-HDW1509TP-A-LED-0280B-S2	2.8mm lens
HAC-HDW1509T-A-LED-0280-S2-G	2.8mm lens – Grey
DH-HAC-HDW1509TP-A-LED-0360B-S2	3.6mm lens



## 5MP Full-color HDCVI Bullet Camera DH-HAC-HFW1509TLP-A-LED-0360B-S2

Max 25 fps@5MP (16:9 video output), 120 dB true WDR, 3D NR, 24/7 color imaging, 40m illumination distance, CVI/CVBS/AHD/TVI switchable, Built-in Mic (-A), 3.6 mm fixed lens, IP67, DC12V.



## 4K Real-time HDCVI IR Eyeball Camera DH-HAC-HDW1800TLP-A-0280B

Max. 4K resolution, real-time video transmission, CVI/CVBS/AHD/TVI switchable, Built-in Mic (-A), Fixed lens 2.8mm, Max. IR length 30m, Smart IR, IP67, DC12V.



# HDCVI CAMERAS

## 5MP HDCVI Full-Color Active Deterrence Fixed Eyeball Camera

DH-HAC-ME1509H-A-PV

24/7 color imaging, Active deterrence with red blue light, siren and alarm out interface, Max. 20 fps@5MP, 3.6 mm fixed lens, 40m illumination distance, IP67, DC12V.

DH-HAC-ME1509HP-A-PV-0280B	2.8mm lens
HAC-ME1509H-A-PV-0280-G	2.8mm lens – Grey
DH-HAC-ME1509HP-A-PV-0360B	3.6mm lens



## 4K HDCVI Full-Color Active Deterrence Fixed Eyeball Camera

DH-HAC-ME1809HP-A-PV-0280B

24/7 color imaging, Active deterrence with red blue light, Built-in Mic, Max. 30 fps@4K, 2.8mm fixed lens, 40m illumination distance, IP67, DC12V.



## 5MP HDCVI Full-Color Active Deterrence Fixed Bullet Camera

DH-HAC-ME1509THP-A-PV-0360B

24/7 color imaging, Active deterrence with red blue light, Built-in Mic, Max. 20 fps@5MP, 3.6mm fixed lens, 40m illumination distance, IP67, DC12V.





**2MP Starlight HDCVI IR Bullet Camera**  
HAC-HFW3231E-Z

Starlight, 120dB true WDR, 3DNR, Max 30fps@1080P, HD and SD dual-output, 2.7-12mm motorized lens, Max. IR length 100m, Smart IR, 1/1 Alarm in/out, 1 audio in, IP67, IK10, AC24V/DC12V.



**2MP 4x Starlight HDCVI PTZ Camera**  
SD22204-GC-LB

1/2.8" 2MP STARVIS™ CMOS, Powerful 4x optical zoom, Starlight technology, 120 dB true WDR, 3D DNR, Max. 25/30 fps@1080P, 25/30/50/60 fps@720P, IP66, IK10, DC12V.



**2MP 25x Starlight IR PTZ HDCVI Camera**  
SD49225-HC-LA

1/2.8" 2MP STARVIS™ CMOS, Powerful 25x optical zoom, Starlight technology, 120 dB true WDR, 3D DNR, Max. 25/30 fps@1080P, 25/30/50/60 fps@720P, IR distance up to 100m, IP66 Includes PFB305W Wall Mount, DC12V.



**2MP 25x Starlight IR PTZ HDCVI Camera**  
SD59225-HC-LA


1/2.8" 2MP STARVIS™ CMOS, Powerful 25x optical zoom, Starlight technology, 120 dB true WDR, 3D DNR, Max. 25/30 fps@1080P, 25/30/50/60 fps@720P, IR distance up to 150m, IP66 Includes PFB300S Wall Mount, PFA110 Adapter & PSU.



# **Network Video Recorders.**

# Dahua Naming Rule

## General NVR

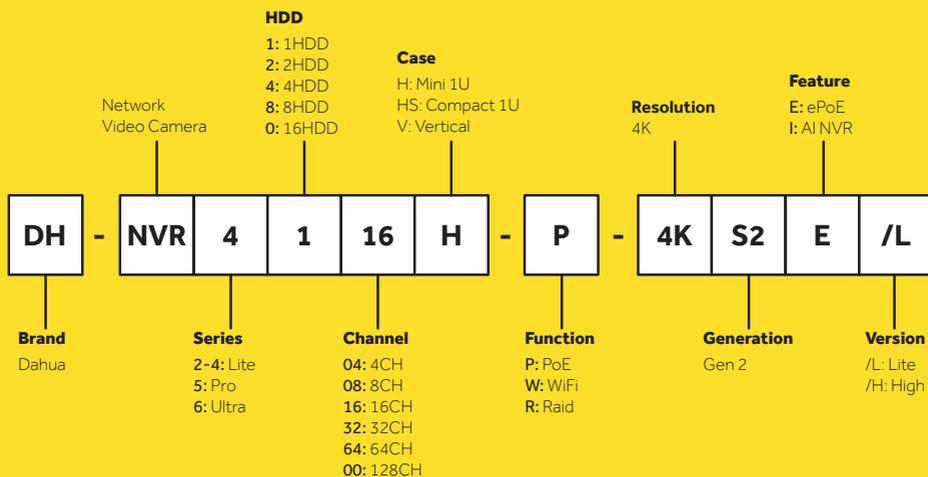

# NETWORK VIDEO RECORDERS



## 8 Channel 1U WizSense NVR

NVR2108-I

New 4.0 user interface, Remote surveillance, live view and video play on mobile phone App, Max. decoding capability: 4×1080P@30fps. Supports adaptive decoding, Supports mainstream cameras of ONVIF and RTSP protocols, H.264/H.265/Smart H.264+/Smart H.265+/MJPEG, H.265 auto switch, 1 VGA/1 HDMI simultaneous video output by default, the maximum resolution of HDMI is 4K; and non-simultaneous video output is also supported, the maximum resolution is 1080P, 1-channel face detection and recognition (AI by NVR); or 2-channel perimeter detection (AI by NVR); or 4-channel SMD (AI by NVR); up to 10 face databases and 5,000 face images, All channel AI by camera: face detection and comparison, perimeter protection and SMD, Security baseline 2.11.

NVR2108-I-1TB	1TB Storage
NVR2108-I-2TB	2TB Storage
NVR2108-I-3TB	3TB Storage
NVR2108-I-4TB	4TB Storage



## 4 Channel Compact 1U 1HDD 4PoE NVR

NVR4104HS-P-4KS2/L

UI interface with easier operation experience, Smart H.265+/ Smart H.264+, P2P remote surveillance, video play on mobile device, 4-ch@4MP(30FPS), self-adaptive decoding capability, Supports mainstream cameras of ONVIF and RTSP protocol, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches, DHCP, HTTP and DDNS.

NVR4104HS-P-4KS2/L-1TB	1TB Storage
NVR4104HS-P-4KS2/L-2TB	2TB Storage
NVR4104HS-P-4KS2/L-3TB	3TB Storage
NVR4104HS-P-4KS2/L-4TB	4TB Storage
NVR4104HS-P-4KS2/L-6TB	6TB Storage
NVR4104HS-P-4KS2/L-8TB	8TB Storage
NVR4104HS-P-4KS2/L-10TB	10TB Storage





## 8 Channel 1U 2HDDs 8PoE NVR NVR4108HS-8P-4KS2/L

New UI interface with easier operation experience, Smart H.265+/ Smart H.264+, P2P remote surveillance, video play on mobile device, 8-ch@1080P(30FPS), self-adaptive decoding capability, Supports mainstream cameras of ONVIF and RTSP protocol, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches, DHCP, HTTP, NTP and DDNS.

NVR4108HS-8P-4KS2/L-1TB	1TB Storage
NVR4108HS-8P-4KS2/L-2TB	2TB Storage
NVR4108HS-8P-4KS2/L-3TB	3TB Storage
NVR4108HS-8P-4KS2/L-4TB	4TB Storage
NVR4108HS-8P-4KS2/L-6TB	6TB Storage
NVR4108HS-8P-4KS2/L-8TB	8TB Storage
NVR4108HS-8P-4KS2/L-10TB	10TB Storage



## 8 Channel 1U 2HDDs 8PoE NVR NVR4208-8P-4KS2/L

New UI interface with easier operation experience, Smart H.265+/ Smart H.264+, P2P remote surveillance, video play on mobile device, 8-ch@1080P(30FPS), self-adaptive decoding capability, Supports mainstream cameras of ONVIF and RTSP protocol, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches, DHCP, HTTP, NTP and DDNS.

NVR4208-8P-4KS2/L-1TB	1TB Storage
NVR4208-8P-4KS2/L-2TB	2TB Storage
NVR4208-8P-4KS2/L-3TB	3TB Storage
NVR4208-8P-4KS2/L-4TB	4TB Storage
NVR4208-8P-4KS2/L-6TB	6TB Storage
NVR4208-8P-4KS2/L-8TB	8TB Storage
NVR4208-8P-4KS2/L-12TB	12TB Storage
NVR4208-8P-4KS2/L-16TB	16TB Storage



# NETWORK VIDEO RECORDERS



## 16 Channel 1U 2HDDs 16PoE NVR4216-16P-4KS2/L

UI interface, Smart H.265+ / Smart H.264+, P2P remote surveillance, video play on mobile device, 16-ch@720P(30FPS), self-adaptive decoding capability, supports mainstream cameras of ONVIF and RTSP protocol, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches, DHCP, HTTP, NTP and DDNS.

NVR4216-16P-4KS2/L-1TB	1TB Storage
NVR4216-16P-4KS2/L-2TB	2TB Storage
NVR4216-16P-4KS2/L-3TB	3TB Storage
NVR4216-16P-4KS2/L-4TB	4TB Storage
NVR4216-16P-4KS2/L-6TB	6TB Storage
NVR4216-16P-4KS2/L-8TB	8TB Storage
NVR4216-16P-4KS2/L-10TB	10TB Storage
NVR4216-16P-4KS2/L-12TB	12TB Storage
NVR4216-16P-4KS2/L-16TB	16TB Storage



## 16 Channel 1U 2HDDs NVR NVR4216-4KS2/L

New UI interface with easier operation experience, Smart H.265+ / Smart H.264+, P2P remote surveillance, video play on mobile device, 16-ch@720P(30FPS), self-adaptive decoding capability, Supports mainstream cameras of ONVIF and RTSP protocol, VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K, Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches, DHCP, HTTP, NTP, and DDNS.

NVR4216-4KS2/L-2TB	2TB Storage
NVR4216-4KS2/L-4TB	4TB Storage
NVR4216-4KS2/L-8TB	8TB Storage
NVR4216-4KS2/L-12TB	12TB Storage
NVR4216-4KS2/L-16TB	16TB Storage





## 8 Channel 1U 2HDDs 8PoE 4K&H.265 Pro NVR NVR5208-8P-4KS2E

Smart H.265+/H.265/Smart H.264+/H.264. Max 320Mbps incoming bandwidth. 8PoE ports. Up to 12MP Resolution for Preview and Playback. HDMI/ VGA simultaneous video output. All PoE ports support ePoE & EoC when used with LR1002's.

NVR5208-8P-4KS2E-1TB	1TB Storage
NVR5208-8P-4KS2E-2TB	2TB Storage
NVR5208-8P-4KS2E-3TB	3TB Storage
NVR5208-8P-4KS2E-4TB	4TB Storage
NVR5208-8P-4KS2E-6TB	6TB Storage
NVR5208-8P-4KS2E-8TB	8TB Storage
NVR5208-8P-4KS2E-12TB	12TB Storage
NVR5208-8P-4KS2E-16TB	16TB Storage



## 16 Channel 8PoE 1U 4K H.265 Pro NVR NVR5216-16P-4KS2E

Smart H.265+/H.265/Smart H.264+/H.264/MJPEG Max 320Mbps incoming bandwidth. 16PoE ports. Up to 12MP Resolution for Preview and Playback 1 x HDMI/1 x VGA simultaneous video output - 1-8 PoE Ports. 1/1 Audio in/out. 4/2 Alarm in/out. Support 800m ePoE & EoC when used with LR1002's.

NVR5216-16P-4KS2E-1TB	1TB Storage
NVR5216-16P-4KS2E-2TB	2TB Storage
NVR5216-16P-4KS2E-4TB	4TB Storage
NVR5216-16P-4KS2E-6TB	6TB Storage
NVR5216-16P-4KS2E-8TB	8TB Storage
NVR5216-16P-4KS2E-10TB	10TB Storage
NVR5216-16P-4KS2E-12TB	12TB Storage
NVR5216-16P-4KS2E-16TB	16TB Storage
NVR5216-16P-4KS2E-20TB	20TB Storage





## 16 Channel 1U 16PoE AI NVR NVR5216-16P-I

16 Channel IP video access. Smart H.265+/H.265/ Smart H.264+/H.264/MJPEG. 16PoE ports. Up to 16 Channel perimeter protection. Up to 4 Channel video stream face recognition. Up to 24 face pictures /sec processing. Up to 20 face databases with 100,000 face images in total. 1 x HDMI/ 1 x VGA. 1/1 Audio in/out. 4/2 Alarm in/out. 1-8 PoE Ports support ePoE & EoC when used with LR 1002's.

NVR5216-16P-I-1TB	1TB Storage
NVR5216-16P-I-2TB	2TB Storage
NVR5216-16P-I-3TB	3TB Storage
NVR5216-16P-I-4TB	4TB Storage
NVR5216-16P-I-6TB	6TB Storage
NVR5216-16P-I-8TB	8TB Storage
NVR5216-16P-I-12TB	12TB Storage
NVR5216-16P-I-16TB	16TB Storage



## 64 Channel Ultra 4K H.265 NVR NVR608-64-4KS2

Intel Processor. Max 64IP Camera Inputs. Max 384Mbps incoming bandwidth. Up to 12MP Resolution for Preview and Playback. 2 x HDMI / 1 x VGA. 1/1 Audio in/out. 16/8 Alarm in/out. Supports RAID 0/1/5/6/10. Smart Tracking and Intelligent Video.

NVR608-64-4KS2-12TB	12TB Storage
NVR608-64-4KS2-16TB	16TB Storage
NVR608-64-4KS2-24TB	24TB Storage
NVR608-64-4KS2-30TB	30TB Storage
NVR608-64-4KS2-42TB	42TB Storage
NVR608-64-4KS2-48TB	48TB Storage
NVR608-64-4KS2-64TB	64TB Storage





# MORE THAN A VIDEO MANAGEMENT SYSTEM



New **User Friendly** Interface



**"3 + 2 + 1 + N"** Application-Based Design



**DeepXplore** AI-Powered Search Engine



**Real-time** and Integrated **Monitoring**

**DSS Professional is a centralised management system designed for large-scale and industrial applications.** It enhances hardware performance and provides centralised video monitoring across all Dahua platforms.



## DSS LICENSES


DSS8PRVB	16 video base license for DSSPro 8
DSS8PRV	1 video channel license for DSSPro 8
DSS8PRVEM	Vehicle entrance management module for DSSPro 8
DSS8PRVDP	1 VDP device license for DSSPro 8
DSS8PRD	1 door channel license for DSSPro 8
DSS8PRDB	16 door base license for DSSPro 8
DSS8PRATT	Attendance management module license for DSSPro 8
DSS8PRPOS	1 POS channel license for DSSPro 8

\*Other license options available upon request.

# **Hybrid Video Recorders.**

# Dahua Naming Rule

## General XVR

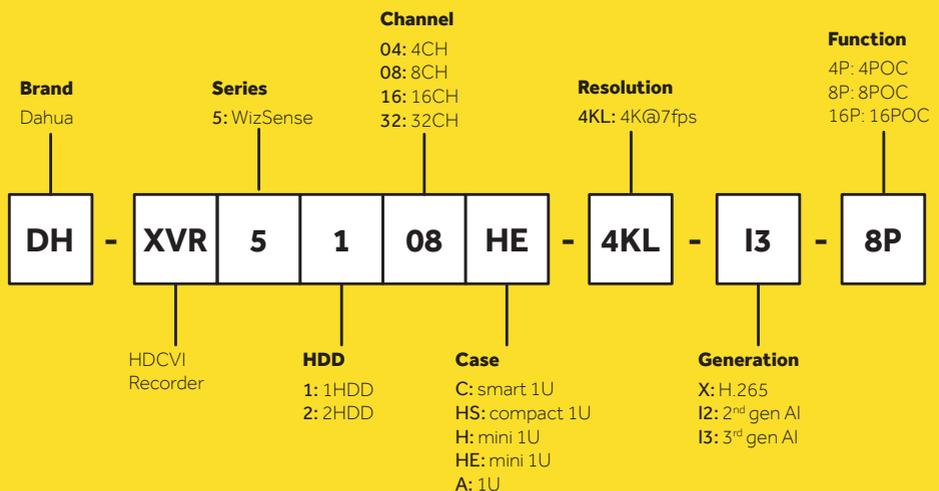

# HYBRID VIDEO RECORDERS



## 4 Channel Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense DVR XVR5104HS-I2

H.265+/H.265 dual-stream video compression. Supports HDCVI/AHD/TVI/CVBS/IP video inputs. Max 8 channels IP camera inputs, each channel up to 8MP; 1/1 Audio in/out. Max 64Mbps incoming bandwidth. Smart Search and Intelligent Video System.

XVR5104HS-I2-1TB	1TB Storage
XVR5104HS-I2-2TB	2TB Storage
XVR5104HS-I2-3TB	3TB Storage
XVR5104HS-I2-4TB	4TB Storage
XVR5104HS-I2-6TB	6TB Storage



## 4 Channel Penta-brid 5M-N/1080p Compact 1U 1HDD WizSense DVR XVR5104HS-I3

H.265+/H.265 dual-stream video compression, Supports Full-channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 6 channels IP camera inputs, each channel up to 6MP; Max 32 Mbps incoming bandwidth, Up to 1 channel video stream (analog channel) Perimeter Protection, Up to 4 channels video stream (analog channel) SMD Plus, Up to 1 channel video stream (analog channel) human face recognition, IoT & POS functionalities.

XVR5104HS-I3-1TB	1TB Storage
XVR5104HS-I3-2TB	2TB Storage
XVR5104HS-I3-3TB	3TB Storage
XVR5104HS-I3-4TB	4TB Storage
XVR5104HS-I3-6TB	6TB Storage





## 4 Channel Penta-brid 4K Mini 1U DVR

XVR5104H-4KL-X-4P

H.265+/H.265 dual-stream video compression. Supports HDCVI/AHD/TVI/CVBS/IPvideo inputs. Max 6 channels IP camera inputs. each channel up to 6MP; 1/1 Audio in/out. Max 24Mbps incoming bandwidth. Smart Search and Intelligent Video System.

XVR5104H-4KL-X-4P-1TB	1TB Storage
XVR5104H-4KL-X-4P-2TB	2TB Storage
XVR5104H-4KL-X-4P-3TB	3TB Storage
XVR5104H-4KL-X-4P-4TB	4TB Storage



## 4 Channel Penta-brid 5MP Compact 1U 1HDD

WizSense DVR

XVR5104HS-4KL-I3

H.265+/H.265 dual-stream video compression, Supports Full-channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 8 channels IP camera inputs, each channel up to 8MP; Max 64 Mbps incoming bandwidth, Up to 1 channel video stream (analog channel) Perimeter Protection, Up to 4 channels video stream (analog channel) SMD Plus, Up to 1 channel video stream (analog channel) human face recognition, IoT & POS functionalities.

XVR5104HS-4KL-I3-1TB	1TB Storage
XVR5104HS-4KL-I3-2TB	2TB Storage
XVR5104HS-4KL-I3-3TB	3TB Storage
XVR5104HS-4KL-I3-4TB	4TB Storage
XVR5104HS-4KL-I3-6TB	6TB Storage



# HYBRID VIDEO RECORDERS



## 4 Channel Penta-brid 1080P Compact 1U DVR XVR5104H-X-4P

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 6/12 channels IP camera inputs, each channel up to 6MP; Max 24/48 Mbps incoming bandwidth, Supports SMD, human face detection, IVS, All-channel support HDCVI PoC AT & AF camera.

XVR5104H-X-4P-1TB	1TB Storage
XVR5104H-X-4P-2TB	2TB Storage
XVR5104H-X-4P-3TB	3TB Storage
XVR5104H-X-4P-4TB	4TB Storage



## 8 Channel Penta-brid 1080P Compact 1U DVR XVR5108HS-X

H.265+/H.265 dual-stream video compression. Supports HDCVI/AHD/TVI/CVBS/IP video inputs. Max 12 channels IP camera inputs. each channel up to 6MP; 1/1 Audio in/out. Max 48Mbps incoming bandwidth. Smart Search and Intelligent Video System.

XVR5108HS-X-1TB	1TB Storage
XVR5108HS-X-2TB	2TB Storage
XVR5108HS-X-3TB	3TB Storage
XVR5108HS-X-4TB	4TB Storage
XVR5108HS-X-6TB	6TB Storage
XVR5108HS-X-8TB	8TB Storage



**8 Channel Penta-brid 1080P Smart 1U DVR**  
XVR5108C-X

H.265+/H.265 dual-stream video compression.  
Supports HDCVI/ AHD/TVI/CVBS/IP video inputs. Max 12 channels IP camera inputs, each channel up to 6MP; 1/1 Audio in/out. Max 48Mbps incoming bandwidth. Smart Search and Intelligent Video System.

XVR5108C-X-1TB	1TB Storage
XVR5108C-X-2TB	2TB Storage
XVR5108C-X-3TB	3TB Storage
XVR5108C-X-4TB	4TB Storage
XVR5108C-X-8TB	8TB Storage



**8 Channel Penta-brid 4K Compact 1U 1HDD**  
WizSense DVR

XVR5108HS-4KL-I2  
H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth, Perimeter Protection and SMD Plus, Up to 2 channels video stream (analog channel) human face recognition, IoT & POS functionalities.

XVR5108HS-4KL-I2-1TB	1TB Storage
XVR5108HS-4KL-I2-2TB	2TB Storage
XVR5108HS-4KL-I2-3TB	3TB Storage
XVR5108HS-4KL-I2-4TB	4TB Storage
XVR5108HS-4KL-I2-6TB	6TB Storage
XVR5108HS-4KL-I2-8TB	8TB Storage
XVR5108HS-4KL-I2-10TB	10TB Storage



# HYBRID VIDEO RECORDERS



## 8 Channel Penta-brid 4K-N/5MP Mini 1U 1HDD

### WizSense DVR

XVR5108HE-4KL-I2

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth, Up to 2 channels video stream (analog channel) Perimeter Protection, Up to 8 channels video stream (analog channel) SMD Plus, Up to 2 channels video stream (analog channel) human face recognition, IoT & POS functionalities.

XVR5108HE-4KL-I2-2TB	2TB Storage
XVR5108HE-4KL-I2-4TB	4TB Storage



## 8 Channel Penta-brid 5M-N/1080p Compact 1U 1HDD

### WizSense DVR

XVR5108HS-I3

H.265+/H.265 dual-stream video compression, Supports Full-channel AI-Coding, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 12 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps incoming bandwidth, Up to 1 channel video stream (analog channel) Perimeter Protection, Up to 8 channels video stream (analog channel) SMD Plus, Up to 1 channel video stream (analog channel) human face recognition, IoT & POS functionalities.

XVR5108HS-I3-1TB	1TB Storage
XVR5108HS-I3-2TB	2TB Storage
XVR5108HS-I3-3TB	3TB Storage
XVR5108HS-I3-4TB	4TB Storage
XVR5108HS-I3-6TB	6TB Storage
XVR5108HS-I3-8TB	8TB Storage





## 8 Channel Penta-brid 4K Mini 1U DVR

XVR5108H-4KL-X-8P

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 12 channels IP camera inputs, each channel up to 8MP; Max 48Mbps incoming bandwidth, Smart Search and Intelligent Video System, Total 48W output power consumption; Max supports 8 channels AF PoC cameras inputs or 4 channels AT PoC cameras inputs. Note: HDCVI PoC system temporarily does not support balun accessing and UTP transmission.

XVR5108H-4KL-X-8P-1TB	1TB Storage
XVR5108H-4KL-X-8P-2TB	2TB Storage
XVR5108H-4KL-X-8P-3TB	3TB Storage
XVR5108H-4KL-X-8P-4TB	4TB Storage
XVR5108H-4KL-X-8P-6TB	6TB Storage
XVR5108H-4KL-X-8P-8TB	8TB Storage



## 16 Channel Penta-brid 5M-N/1080P 1U 2HDDs

WizSense DVR

XVR5216A-I2

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth, Perimeter Protection and SMD Plus, Up to 2 channels video stream (analog channel) human face recognition, IoT & POS functionalities.

XVR5216A-I2-1TB	1TB Storage
XVR5216A-I2-2TB	2TB Storage
XVR5216A-I2-3TB	3TB Storage
XVR5216A-I2-4TB	4TB Storage
XVR5216A-I2-6TB	6TB Storage
XVR5216A-I2-8TB	8TB Storage
XVR5216A-I2-10TB	10TB Storage
XVR5216A-I2-12TB	12TB Storage



# HYBRID VIDEO RECORDERS



## 16 Channel Penta-brid 4K-N/5MP 1U 2HDDs

### WizSense DVR

XVR5216AN-4KL-I2

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth, Perimeter Protection and SMD Plus, Up to 2 channels video stream (analog channel) human face detection, IoT & POS functionalities.

XVR5216AN-4KL-I2-1TB	1TB Storage
XVR5216AN-4KL-I2-2TB	2TB Storage
XVR5216AN-4KL-I2-3TB	3TB Storage
XVR5216AN-4KL-I2-4TB	4TB Storage
XVR5216AN-4KL-I2-6TB	6TB Storage
XVR5216AN-4KL-I2-8TB	8TB Storage
XVR5216AN-4KL-I2-10TB	10TB Storage
XVR5216AN-4KL-I2-12TB	12TB Storage
XVR5216AN-4KL-I2-16TB	16TB Storage
XVR5216AN-4KL-I2-20TB	20TB Storage



## 32 Channel Penta-brid 4K-N/5MP 1U WizSense DVR

XVR5232AN-4KL-I2

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth, Up to 6 channels video stream (analog channel) perimeter protection, Up to 32 channels video stream (analog channel) SMD plus, Up to 6 channels video stream (analog channel) human face recognition, IoT & POS functionalities.

XVR5232AN-4KL-I2-4TB	4TB Storage
XVR5232AN-4KL-I2-6TB	6TB Storage
XVR5232AN-4KL-I2-8TB	8TB Storage
XVR5232AN-4KL-I2-10TB	10TB Storage
XVR5232AN-4KL-I2-12TB	12TB Storage
XVR5232AN-4KL-I2-16TB	16TB Storage
XVR5232AN-4KL-I2-20TB	20TB Storage





## 16 Channel Penta-brid 1080P 1U DVR XVR5216AN-X-16P

H.265+/H.265 dual-stream video compression, Supports HDCVI/AHD/TVI/CVBS/IP video inputs, Max 24 channels IP camera inputs, each channel up to 6MP; Max 96Mbps incoming bandwidth, Supports SMD, human face detection, IVS, All-channel support HDCVI PoC AT & AF camera.

XVR5216AN-X-16P-1TB	1TB Storage
XVR5216AN-X-16P-2TB	2TB Storage
XVR5216AN-X-16P-4TB	4TB Storage
XVR5216AN-X-16P-6TB	6TB Storage
XVR5216AN-X-16P-8TB	8TB Storage
XVR5216AN-X-16P-12TB	12TB Storage
XVR5216AN-X-16P-16TB	16TB Storage



## 16 Channel Penta-brid 4K 1U DVR XVR5216AN-4KL-X-16P

H.265+/H.265 dual-stream video compression. Supports HDCVI/AHD/TVI/CVBS/IP video inputs. Max 24 channels IP camera inputs. each channel up to 8MP; Max 96Mbps incoming bandwidth. Smart Search and Intelligent Video System. Total 96W output power consumption: 1/1 Audio in/out. Max supports 16 channels Lite series PoC cameras inputs or 8 channels Pro series PoC cameras inputs. Note: HDCVI PoC system temporarily does not support balun accessing and UTP transmission.

XVR5216AN-4KL-X-16P-2TB	2TB Storage
XVR5216AN-4KL-X-16P-4TB	4TB Storage
XVR5216AN-4KL-X-16P-6TB	6TB Storage
XVR5216AN-4KL-X-16P-8TB	8TB Storage
XVR5216AN-4KL-X-16P-12TB	12TB Storage
XVR5216AN-4KL-X-16P-16TB	16TB Storage



**Accessories.**

## ADAPTERS



PFA100

**Mount Adapter**

Material: Aluminum



PFA101

**Mount Adapter**

Material: Aluminum



PFA102

**Mount Adapter**

Material: Aluminum



PFA103

**Mount Adapter**

Material: Aluminum



PFA105

**Adapter Plate**

Material: Aluminum



PFA106

**Adapter Plate**

Material: Aluminum



PFA107

**Adapter Plate**

Material: Aluminum



PFA108

**Adapter Plate**

Material: Aluminum



PFA110

**Mount Adapter**

Material: Aluminum



PFA114

**Mount Adapter**

Material: Aluminum



PFA116

**Mount Adapter**

Material: Aluminum



ZAZ100W

**Mount Adapter**

Anti-Corrosion Adapter

# ACCESSORIES

## JUNCTION BOXES



**PFA120**

**Waterproof Junction Box**  
Material: Aluminum



**PFA120A**

**Junction Box**  
Anti-Corrosion Junction Box



**PFA120-SL**

**Junction Box**  
Anti-Corrosion Junction Box



**PFA121**

**Junction Box**  
Material: Aluminum



**PFA122**

**Junction Box**  
Material: Aluminum



**PFA130-E**

**Waterproof Junction Box**  
Material: Aluminum, IP66.



**DH-PFA130-E-G**

**Waterproof Junction Box - Grey**  
Material: Aluminum, IP66



**PFA131**

**Junction Box**  
Material: Aluminum



**PFA132-E**

**Waterproof Junction Box**  
Material: Aluminum



**PFA134**

**Junction Box**  
Material: Aluminum



**PFA135**

**Junction Box**  
Material: Aluminum

**PFA136****Junction Box**

Material: Aluminum

**PFA137****Junction Box**

Material: Aluminum

**PFA137-B****Waterproof Junction Box**

Material: Aluminum

**PFA137-G****Junction Box**

Material: Aluminum

**PFA138****Junction Box**

Material: Aluminum

**PFA139****Junction Box**

Material: Aluminum

**PFA139-G****Junction Box**

Material: Aluminum

**PFA13A-E****Junction Box**

Material: Aluminum

**PFA13C****Junction Box**

Material: Aluminum

**PFA13C-G****Junction Box**

Material: Aluminum

**ZA-JXD4****Junction Box**

Anti-Corrosion Junction Box

# ACCESSORIES



**ZA J300**

**Junction Box**  
Anti-Corrosion Junction Box



**PFA140**

**Waterproof Power Box**  
Material: Aluminum & SECC



**PFA730**

**Junction Box**  
Material: Aluminum



**PFA773**

**Sun Shield**  
Material: Aluminum

## BRACKETS



**PFA112**

**Ceiling Mount**  
Material: Aluminum, 220mm length



**PFA113**

**Ceiling Mount**  
Material: Aluminum, 420mm length



**PFA151**

**Corner Mount**  
Material: SECC



**PFA150**

**Pole Mount**  
Material: SECC



**PFA152-E**

**Pole Mount**  
Material: Aluminum



**PFA153**

**Heavy-Duty Pole Mount**  
Material: Aluminum



PFA153A

**Heavy-Duty Corrosion-Proof Pole Mount**

Material: Aluminum



PFA200W

**Rain Shade**

Material: Aluminum &amp; SGCC, Rain shade for dome camera



PFB121W

**Wall Mount**

Material: Aluminum



PFB129W

**Wall Mount Bracket**

Material: Aluminum



PFB200C

**In-Ceiling Mount**

Material: SECC &amp; PC



PFB201C

**In-Ceiling Mount**

Material: SECC &amp; PC



PFB203W

**Waterproof Wall Mount**

Material: Aluminum



PFB203W-G

**Waterproof Wall Mount**

Material: Aluminum



PFB205W

**Wall Mount Bracket**

Material: Aluminum



PFB205W-G

**Waterproof Wall Mount**

Material: Aluminum



PFB211W

**Wall Mount Bracket**

Material: Aluminum

# ACCESSORIES

---

	<b>PFB220C</b>	<b>Ceiling Mount</b> Material: Aluminum, 767mm length
	<b>PFB120C</b>	<b>Ceiling Mount</b> Material: Aluminum, 767mm length
	<b>PFB300C</b>	<b>Ceiling Mount</b> Material: Aluminum & PC (requires PFA100/PFA101)
	<b>PFB300S</b>	<b>PTZ Camera Bracket</b> Material: Aluminum
	<b>PFB301S-E</b>	<b>Parapet Mount</b> Material: Aluminum, 10kg load-bearing capacity
	<b>PFB302S-V2</b>	<b>Waterproof Wall Mount Bracket</b> IP66 - Material: Aluminum - Junction box function (requires PFA100/PFA101)
	<b>PFB303S</b>	<b>Parapet Mount</b> For SD59, SD6A, SD6C (requires PFA114 if used with SD6C)
	<b>PFB303W</b>	<b>Waterproof Wall Mount Bracket</b> Material: Aluminum
	<b>PFB303W-SL</b>	<b>Wall Mount</b> Anti-Corrosion Wall Mount
	<b>PFB305W</b>	<b>Waterproof Wall Mount</b> IP66 - Material: Aluminum - Junction box function (requires PFA100/PFA101)
	<b>PFB410W</b>	<b>Fisheye-PTZ Integrated Bracket</b> Material: Aluminum, Support linkage scheme between fisheye and speed dome, integrated installation, Multi-dimensional adjustment, able to meet Omni-directional observation requirements from different angles, Safety rope hook attached, secure and reliable, Maintenance cover board attached, convenient operation.

---



**PFB600W**

**14" Housing Ceiling Mount**

Material: Aluminum & PC



**PFB601W**

**14" Housing Plane Mount**

Material: Aluminum & PC



**PFB604W**

**Wall Mount Bracket**

Material: Aluminum



**PFB710W**

**Wall Mount Bracket**

Material: Stainless Steel



**PFB730W**

**Wall Mount**

Material: Aluminum



**EXB100**

**Wall Mount**

Anti-Corrosion Wall Mount



**EXB109**

**Wall Mount**

Anti-Corrosion Wall Mount



**ZAZ660B**

**Wall Mount**

Anti-Corrosion Wall Mount

**Everything you need in one place...**  
**alarm-supplies.com**

---

**Alarm Supplies Glasgow (Head Office)**

12e Eurogateway, Port Dundas Business Park  
100 Borron Street, Glasgow, G4 9XG  
Tel: 0141 353 1354  
Fax: 0141 353 1358  
Email: glasgow@alarm-supplies.com

**Alarm Supplies Edinburgh**

Unit's 6/7, Dryden Glen  
Loanhead, Midlothian, EH20 9NA  
Tel: 0131 448 2555  
Fax: 0131 448 2777  
Email: edinburgh@alarm-supplies.com

**Alarm Supplies Carlisle**

Unit R2 Kingmoor Park Road, Kingmoor  
Park Central, Carlisle, CA6 4SD  
Tel: 01228 404 670  
Fax: 01228 404 671  
Email: carlisle@alarm-supplies.com

**Alarm Supplies Newcastle**

48a Cuthbert Court, Bede Industrial Estate  
Jarrow, South Shields, NE32 3EG  
Tel: 0191 483 5800  
Fax: 0191 483 9950  
Email: newcastle@alarm-supplies.com

**Alarm Supplies Liverpool**

15 Farriers Way Industrial Estate  
Bootle, Merseyside, L30 4XL  
Tel: 0151 523 9677  
Fax: 0151 525 2874  
Email: liverpool@alarm-supplies.com

**Alarm Supplies Belfast**

Unit 5, Enterprise House, Boucher Place,  
Boucher Belfast, BT12 6HT  
Tel: 02890 684 280  
Fax: 02890 684 281  
Email: belfast@alarm-supplies.com





0141 3531354  
alarm-supplies.com

---

**Alarm Supplies Glasgow (Head Office)**

12e Eurogateway, Port Dundas Business Park  
100 Borron Street, Glasgow, G4 9XG

Tel: 0141 353 1354

Fax: 0141 353 1358

Email: glasgow@alarm-supplies.com

**Alarm Supplies Edinburgh**

Unit's 6/7, Dryden Glen  
Loanhead, Midlothian, EH20 9NA

Tel: 0131 448 2555

Fax: 0131 448 2777

Email: edinburgh@alarm-supplies.com

**Alarm Supplies Carlisle**

Unit R2 Kingmoor Park Road, Kingmoor  
Park Central, Carlisle, CA6 4SD

Tel: 01228 404 670

Fax: 01228 404 671

Email: carlisle@alarm-supplies.com

**Alarm Supplies Newcastle**

48a Cuthbert Court, Bede Industrial Estate  
Jarrow, South Shields, NE32 3EG

Tel: 0191 483 5800

Fax: 0191 483 9950

Email: newcastle@alarm-supplies.com

**Alarm Supplies Liverpool**

15 Farriers Way Industrial Estate  
Bootle, Merseyside, L30 4XL

Tel: 0151 523 9677

Fax: 0151 525 2874

Email: liverpool@alarm-supplies.com

**Alarm Supplies Belfast**

Unit 5, Enterprise House, Boucher Place,  
Boucher Belfast, BT12 6HT

Tel: 02890 684 280

Fax: 02890 684 281

Email: belfast@alarm-supplies.com